

**Material**

Polyvinyl Chloride (PVC)

Wall Thickness13mm to 99mm diameter - 0.5mm
100mm to 400mm diameter - 0.6mm**Colour**

Clear

Single Length

10m rolls / cut lengths to order

Temperature Resistance

0° up to + 70° C

Applications

Low pressure air, fume and dust handling and cable conduit


Properties

- high flexibility
- smooth bore

Eximo ClearFlex

ClearFlex Heavy

Medium weight and flexible PVC ducting

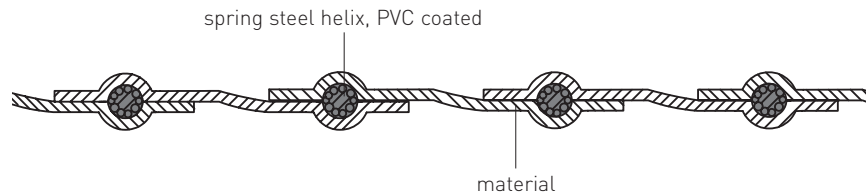

Technical Data

Further diameters available upon request.
Technical data are based on +20° C.

PRODUCT CODE	Weight kg/m	Bend Rad mm	Max work Pressure bar	Max Vacuum bar
CLEARFLEXHVY020	0.110	20	1.90	0.55
CLEARFLEXHVY025	0.170	25	1.70	0.45
CLEARFLEXHVY040	0.240	40	1.40	0.30
CLEARFLEXHVY045	0.265	45	1.35	0.29
CLEARFLEXHVY052	0.290	50	1.30	0.28
CLEARFLEXHVY063	0.460	62	1.05	0.24
CLEARFLEXHVY076	0.630	75	0.80	0.20
CLEARFLEXHVY082	0.700	80	0.70	0.18
CLEARFLEXHVY090	0.750	90	0.65	0.17
CLEARFLEXHVY102	0.790	100	0.60	0.15
CLEARFLEXHVY110	0.890	113	0.50	0.13
CLEARFLEXHVY127	0.980	125	0.40	0.12
CLEARFLEXHVY152	1.180	150	0.25	0.10
CLEARFLEXHVY180	1.435	175	0.23	0.10
CLEARFLEXHVY203	1.690	200	0.20	0.09
CLEARFLEXHVY254	2.100	250	0.15	0.08
CLEARFLEXHVY305	2.520	300	0.12	0.06
CLEARFLEXHVY356	2.930	350	0.10	0.06