


## ClearFlex

*Light weight and very flexible PVC ducting*

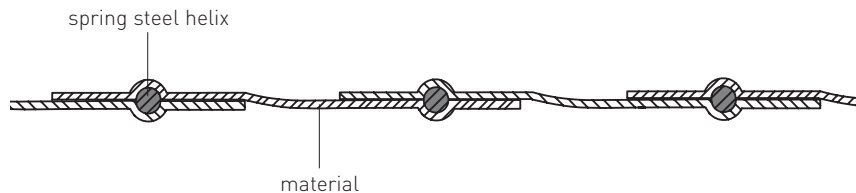

### Technical Data

Further diameters available upon request.  
Technical data are based on +20 °C.

PRODUCT CODE	Wire mm	Weight kg/m	Bend Rad mm	Max work Pressure bar	Max Vacuum bar
CLEARFLEX025	1.0	0.134	16	0.40	0.20
CLEARFLEX032	1.2	0.171	21	0.40	0.20
CLEARFLEX040	1.2	0.228	28	0.40	0.18
CLEARFLEX045	1.2	0.257	32	0.40	0.18
CLEARFLEX052	1.2	0.285	35	0.35	0.15
CLEARFLEX060	1.2	0.342	42	0.35	0.14
CLEARFLEX063	1.2	0.342	42	0.35	0.14
CLEARFLEX076	1.2	0.427	53	0.30	0.10
CLEARFLEX082	1.2	0.456	56	0.25	0.09
CLEARFLEX090	1.2	0.519	63	0.23	0.09
CLEARFLEX102	1.6	0.581	70	0.20	0.08
CLEARFLEX115	1.6	0.653	79	0.18	0.07
CLEARFLEX127	1.6	0.726	88	0.15	0.06
CLEARFLEX152	1.6	0.871	105	0.08	0.05
CLEARFLEX180	1.6	1.017	123	0.06	0.04
CLEARFLEX203	2.0	1.178	140	0.05	0.03
CLEARFLEX229	2.0	1.326	158	0.05	0.03
CLEARFLEX254	2.0	1.473	175	0.04	0.03
CLEARFLEX305	2.0	1.767	210	0.03	0.02
CLEARFLEX356	2.0	2.062	245	0.02	0.02
CLEARFLEX406	2.0	2.356	280	0.02	0.01
CLEARFLEX425	2.0	2.504	297	0.02	0.01
CLEARFLEX457	2.0	2.651	315	0.01	0.01
CLEARFLEX508	2.0	2.945	350	0.01	0.01

#### Material

Polyvinyl Chloride (PVC)

#### Wall Thickness

0.4mm

#### Colour

Clear

#### Single Length

10m rolls / cut lengths to order

#### Temperature Resistance

0° up to + 70° C

#### Applications

Suction of air, fumes and light dusts

#### Properties

- excellent flexibility
- good compressibility

