**Material**

Silicone coated glass fabric

**Wall Thickness**

0.4mm

**Colour**

Silver-grey

**Single Length**

10m rolls / cut lengths to order

**Temperature Resistance**

- 60° C to + 300° C.

**Applications**

Suction of hot fumes, gases or dusts in all fields of industry


**Properties**

- excellent temperature resistance
- flame retardant
- abrasion resistance outer helix
- excellent axial compressibility

# Eximo HotFlex

## HotFlex

*Light weight and very flexible silicone ducting*

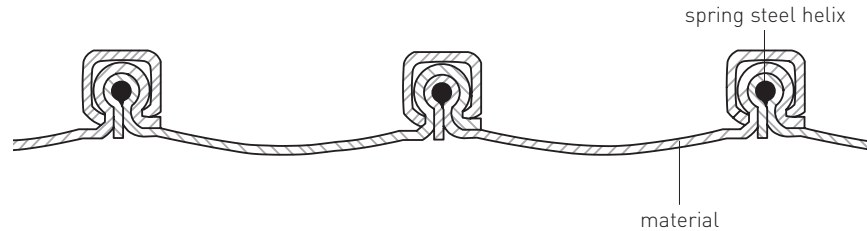

### Technical Data

Further diameters available upon request.  
Technical data are based on +20° C.

| PRODUCT CODE | Weight kg/m | Bend Rad mm | Max work Pressure bar | Max Vacuum bar |
|--------------|-------------|-------------|-----------------------|----------------|
| HOTFLEX052   | 0.40        | 30          | 0.85                  | 0.32           |
| HOTFLEX063   | 0.50        | 37          | 0.49                  | 0.15           |
| HOTFLEX076   | 0.60        | 45          | 0.47                  | 0.14           |
| HOTFLEX1020  | 0.65        | 60          | 0.30                  | 0.08           |
| HOTFLEX127   | 0.80        | 75          | 0.21                  | 0.05           |
| HOTFLEX152   | 0.90        | 90          | 0.16                  | 0.04           |
| HOTFLEX180   | 1.00        | 108         | 0.12                  | 0.02           |
| HOTFLEX203   | 1.21        | 120         | 0.10                  | 0.02           |
| HOTFLEX254   | 1.70        | 175         | 0.07                  | 0.01           |
| HOTFLEX305   | 2.13        | 210         | 0.05                  | 0.01           |
| HOTFLEX406   | 3.10        | 280         | 0.03                  | 0.01           |